

MAX Inflator



MAX Inflator

Portable inflator for Bates dunnage bags with striker valve

Ergonomically designed

Specifically designed and developed for dunnage bag inflation.

Completely portable

Eliminates the need for costly compressors and airlines.

Dual selectable pressure

Choose the output pressure needed as high as 0.15 or low as 0.1Bar.

Easy handling

Lightweight with rubber gripping, eliminating wrist constraints.

MAX Inflator

Portable inflator for Bates dunnage bags with striker valve



The search for fast, effective and completely portable dunnage bag inflation is finally over. Signode's new MAX Inflator delivers maximum inflation speed with a light, battery operated technology maximises speed, reliability, and portability. Reduce costs by eliminating the need to install and maintain a compressor system. Developed by a dedicated team of the industry's leading design engineers and protective transit specialists. Designed specifically for use with Venturi valves, discover the MAX Inflator difference.

Features and benefits

■ Comfortable design

Lightweight (< 2.26 kg.), has a well-balanced center of gravity, and is equipped with contoured rubber gripping to provide a comfortable handling experience for the user, and helps eliminate wrist strain.

■ Selectable dual output selection

Equipped with a selectable HI/LO output pressure switch to accommodate a variety of applications. This option allows the user to choose between a HI output pressure of 0.15 bar or a LO output pressure of 0.1 bar. The switch also comes with a cover installed to protect from inadvertent switching and allows some level of authorized control for switching.

■ No compressor/airline required

Allows user to eliminate the need for expensive compressed air systems, and their associated airlines, thereby eliminating trip hazards from the workplace.

■ Fast inflation speed

Superior speed that reduces the amount of time spent installing the airbag and some more time for completion of other tasks. Twice as fast as some leaf blower style inflators.


■ Double output pressure

Increased output pressure pushes the product to the walls to effectively secure it, reducing risk of shifting in transit. Most leaf blower style inflators range from 0.05 to 0.08 bar, which runs the risk of not effectively securing the product.




Variety of handling options


Belt clip

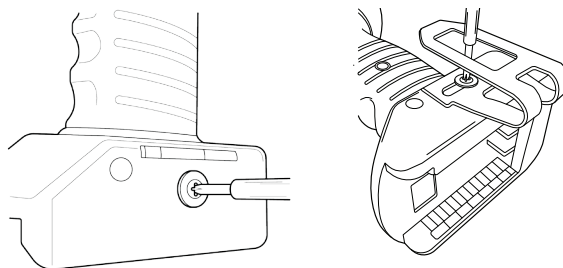


Sling

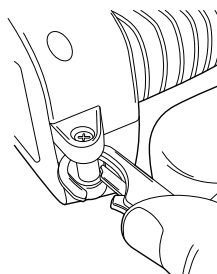

Lanyard

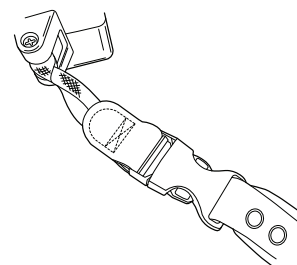

Holster

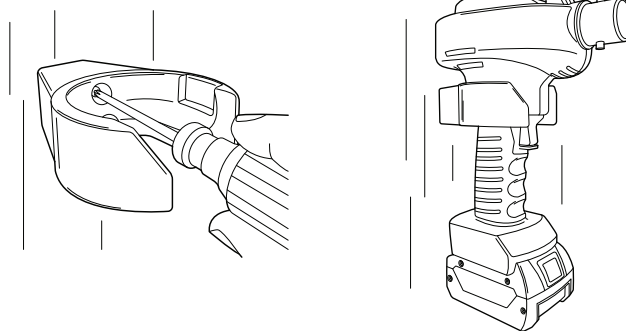

MAX Inflator Adaptor

We also offer an adaptor for the best use with the MAX Inflator:

Item	Item Number
Striker Slinky	89908

